


## Surface Mount Transient Voltage Suppressor

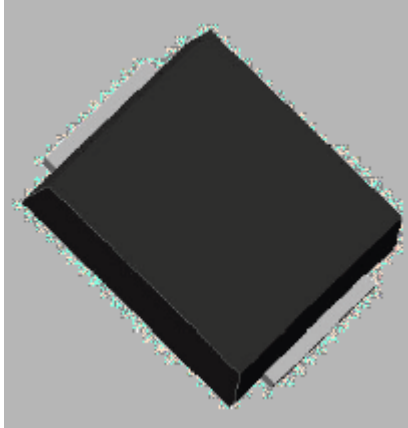

### Features

### Typical Applications

### Mechanical Data Package

### Terminals



### Maximum Ratings

PARAMETER	Junction Temperature	Symbol	T <sup>°</sup>

### Electrical Characteristics °C

Breakdown Voltage V <sub>BR</sub> @I <sub>T</sub>			Maximum Reverse Leakage I <sub>R</sub> @V <sub>RWM</sub> (μA)	Working Peak Reverse Voltage V <sub>RWM</sub> (V)	Typical Capacitance 0V Bias 10kHz (nF)	Maximum Clamping Voltage V <sub>c</sub> @ I <sub>PP</sub> (V)
Min (V)	Max (V)	I <sub>T</sub> (mA)				







**Disclaimer**